

## WHAT'S INCLUDED


- USB 2.0 cable
- DC cable
- CD recording software–Nero 16 essentials
- User guide
- DVD/CD drive

## FRONT DISPLAY




- LED indicator
- EJECT button
- Manual ejection opening

## REAR DISPLAY

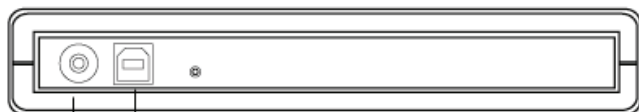

- USB 2.0 port
- DC power jack

## CABLE IDENTIFICATION

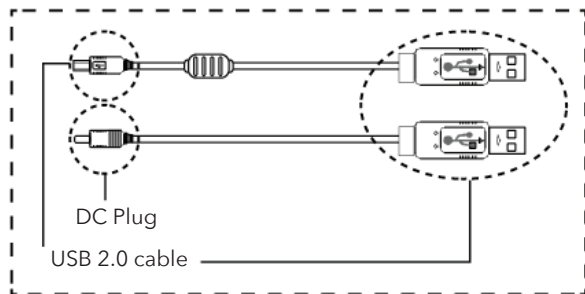


## FEATURES

- Supports both 8cm and 12cm discs
- Supports all of the popular CD and DVD formats
- Multi-recorder for DVD±R/DVD±RW/CD-RW
- Supports hot swapping and plug-and-play functions
- Buffer underrun technology to prevent errors
- High-speed USB 2.0

## OPERATING INSTRUCTIONS


### INSTALLING THE DRIVE

1. Plug the USB 2.0 connector into the device's rear USB 2.0 port.
2. Plug the DC plug into the device's rear DC power jack.

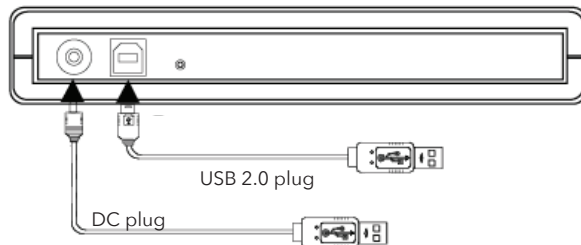

### TRAY OPERATION

Press the EJECTION button and the tray will automatically eject, allowing you access to take or put in a disc.

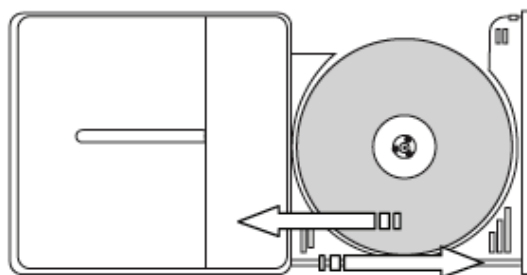

### TROUBLESHOOTING

Why is my USB 2.0 device reading, boot failure?

- Please make sure your disc is not scratched or bent
- Please make sure the version of BIOS supports booting from external CD-ROM, if not, please upgrade your BIOS version
- The device does not support pure DOS mode

**NOTE:** Any improper procedures will affect the function of the computer. Please read the user manual, or contact your computer provider before use.

### SYSTEM REQUIREMENTS

Windows 7/8/10  
Interface: USB 2.0

### NERO 16--SUPPORT

Windows 7 (32/64-bit)  
Windows 8 (32-64-bit)  
Windows 10 (32/64-bit)

**NOTE:** Nero software is for Windows based PC systems only.

### READ SPEEDS:

8x DVD+R  
8x DVD+RW  
6x DVD+R Dual Layer  
24x CD-R  
24x CD-RW  
8x DVD-ROM  
24x CD-ROM

### WRITE SPEEDS:

8x DVD+R  
8x DVD+RW  
6x DVD+R Dual Layer  
24x CD-R  
24x CD-RW

**NOTE:** LED light will blink when the device is reading and writing data.

## SPECIFICATIONS

Disc diameter	8cm/12cm
OS compatibility	Windows 7/8/10
Software	Nero 16 Essentials
Dimensions	135mm x 137mm x 18mm
Weight	281g
Temperature Operating	0-50°C
Temperature Storage	-40-65°C
Humidity Operating	10-90 (%HR)
Humidity Storage	5-95 (%HR)

## CAUTION

Some computers may not provide enough power supply via the USB port alone. If you are experiencing a power issue, the purchase of an optional adapter is recommended to enhance the reliability and quality of this CD/DVD writer.

## CAN ICES-3(B)



## THE SOURCE - WARRANTY

The Source warrants that this product will be free from defects in materials and workmanship for a period of twelve (12) months from the date of purchase. Within this period, simply take the product and your proof of purchase to any The Source store or participating dealer and the product will be replaced (where available) without charge. Any product which has been subject to misuse or accidental damage is excluded from this warranty.

This warranty is only applicable to a product purchased through The Source company-owned stores or participating dealers in Canada where the warranty is included with the product. While this warranty does not confer any legal rights other than those set out above, you may have additional statutory rights which will vary under the laws of the various countries, states, provinces and other governmental entities in which The Source operates. This warranty is subject to all statutory rights you may have in Canada.

Imported by:  
The Source, Barrie, Ontario, Canada, L4M 4W5  
Manufactured in China  
[www.thesource.ca](http://www.thesource.ca)  
© 2019 The Source. All rights reserved.

